Timber Framed Substrate Standard Section Detail




Indicates the primary weather line, designed and supplied by others
project specific, designed by others
project specific, supplied by others

= project specific, designed and supplied by others

The SureBrick system is designed to transfer all of its dead loads (self weight), live loads and wind loadings back to the main substructure.

Variable depth (min. 38mm drained & ventilated cavity -38mm cavity detailed)

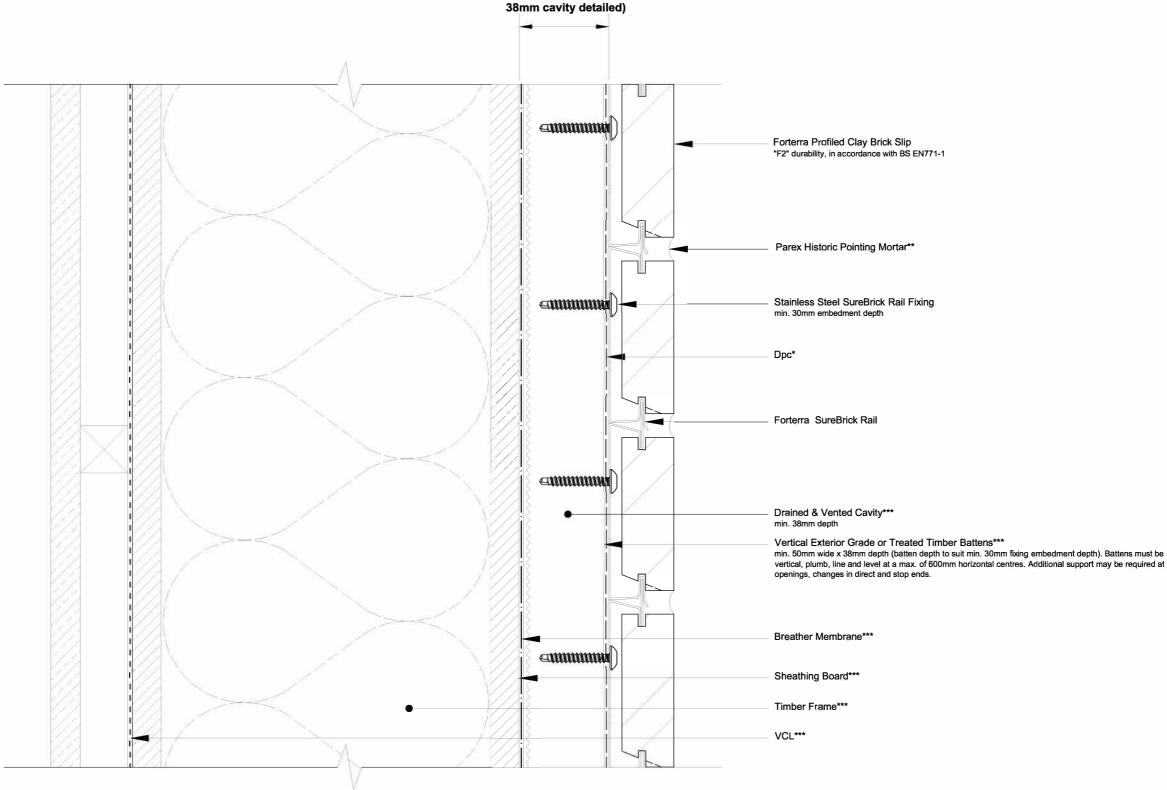

For further information, please contact our dedicated team: Atherstone Road, Measham

Swadlincote, Derbyshire DE12 7EL

Tel. +44 (0) 330 123 1018

Email. asktechnical@forterra.co.uk Web. www.forterra.co.uk

Date.

Revision.

17/04/2019